



HOTBOX

1
Enclosures &
Pipe Supports

Prevent freezing, water loss, downtime, vandalism and repair expenses!

Hot Box® (3/4" to 10")

- Freeze protection to -30° F.
- Smooth exterior styling, with beige gel coat .
- "Flip top" style with front/top access.
- Quick, money-saving installation.
- Modified enclosures are readily available.



Aluminum Hot Box® (4" to 10")

- Freeze protection to -30° F.
- Standard products utilize smooth exterior styling of mill finished aluminum.
- Quick, money-saving installation.
- Large, removable, access doors.
- Modified enclosures are readily available.



Lok Box® (3/4" to 10")

- Lok Box® Enclosures are the same as Hot Box®, but without heat.
- R8 insulation protects against light freezes.
- Vandal resistant.
- **Available in same sizes as Hot Box.**





Model Information

Model #	Pipe Size	Inner Length	Inner Width	Inside Height	Heater Size	Shipping Wt.	Pad Size	Model #	Pipe Size	Inner Length	Inner Width	Inside Height	Heater Size	Shipping Wt.	Pad Size
Fiberglass								Aluminum							
HB.75	.75"-1"	19"	11"	22"	30W Cable	30#	28x20	HB4N	4"	90"	32"	50.5"	2000W Heater	370#	102x44
HB1	.75"-1"	27"	13"	23"	60W Cable	35#	36x22	HB4NS	4"	102"	32"	50.5"	2000W Heater	400#	114x44
HB1T*	.75"-1"	27"	13"	35"	60W Cable	50#	36x22	HB4E	4"	90"	32"	57.5"	2000W Heater	400#	102x44
HB1.5	.75"-1.5"	33"	21"	24"	60W Cable	65#	44x32	HB4ES	4"	102"	32"	57.5"	2000W Heater	450#	114x44
HB2	1.25"-2"	39"	13"	28"	90W Cable	50#	50x24	HB6N	6"	105"	36"	53"	2000W Heater	450#	117x48
HB2S	1.25"-2"	47"	13"	28"	90W Cable	85#	58x24	HB6NS	6"	125"	36"	53"	2/1500W Heaters	475#	137x48
HB2T*	1.25"-2"	39"	13"	36"	90W Cable	60#	50x24	HB6E	6"	105"	36"	64"	2/1500W Heaters	500#	117x48
HB2ST*	1.25"-2"	47"	13"	36"	90W Cable	95#	58x24	HB6ES	6"	125"	36"	64"	2/1500W Heaters	525#	137x48
HB3N	2.5"-3"	70"	26"	45"	1000W Heater	325#	82x38	HB8N	8"	118"	40"	58"	2/1500W Heaters	540#	130x52
HB3NS	2.5"-3"	83"	26"	45"	1500W Heater	340#	95x38	HB8NS	8"	142"	40"	58"	2/1500W Heaters	550#	154x52
HB3E	2.5"-3"	70"	26"	55"	1500W Heater	385#	82x38	HB8E	8"	118"	40"	74"	2/1500W Heaters	575#	130x52
HB3ES	2.5"-3"	83"	26"	55"	1500W Heater	425#	95x38	HB8ES	8"	142"	40"	74"	2/2000W Heaters	610#	154x52
HB3000	2.5"-4"	45"	35"	35"	1000W Heater	120#	57x47	HB10N	10"	142"	42"	65"	2/1500W Heaters	600#	154x54
HB4FEM+	2.5"-4"	41"	41"	45"	1000W Heater	210#	53x53	HB10NS	10"	172"	42"	65"	2/1500W Heaters	675#	154x54
HB6FEM+	6"	47"	47"	49"	1500W Heater	250#	57x57	HB10E	10"	142"	42"	85"	2/2000W Heaters	700#	154x54
HB8FEM+	8"	53"	53"	56"	1500W Heater	300#	63x63	HB10ES	10"	172"	42"	85"	2/2000W Heaters	775#	184x54
HB10FEM+	10"	62"	54"	56"	2000W Heater	490#	74x66	HB10FE+	10"	62"	54"	56"	2000W Heater	375#	74x66

Factory modifications to length, width or height available on request.

See SIZING MATRIX for standard sizes by BFP make and model.

Heating cables are UL Listed & CSA Certified - Heaters are UL Listed
 Electric service must be in accordance with N.E.C. and local ordinances
 GFI is recommended.

* "T" = 30" centerline backflow prevention device mounting.

N = NRS; E = OS&Y Enclosed; S = w/strainer


American Backflow Specialties

www.americanbackflow.com

(800) 66-BKFLO

(619) 527-2525

Fax: (619) 527-2527

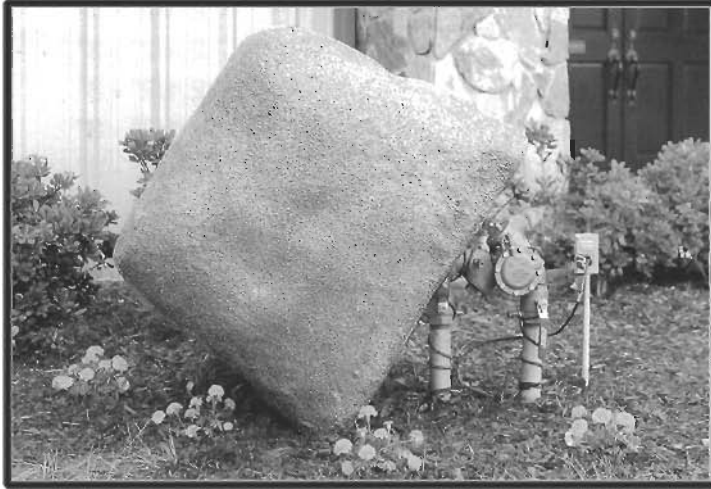

HOTBOX

1
Enclosures &
Pipe Supports

Hot Rok®

The attractive, insulated enclosure that enhances the appearance of your property.

Features

Hot Rok® Insulated Enclosures (for 3/4" to 3" backflow devices):

- Quality fiberglass construction
- Engineered freeze protection
- Drains sized for port discharge
- Testing and maintenance access
- Vandal protection
- Aesthetically pleasing
- Blends in with the landscape
- Versatility:
 - AVAILABLE WITH OR WITHOUT HEAT
 - STANDARD COLORS: GRANITE, BROWN, DESERT ROSE, AND MORE
 - AVAILABLE WITH OR WITHOUT INSULATION
 - AVAILABLE WITH OR WITHOUT DRAINS

See reverse side for
model numbers and
characteristics





HOT ROK® Model Information

<u>UNIT NUMBER</u>	<u>MODEL</u>	<u>PIPE SIZE</u>	<u>INSIDE LENGTH</u>	<u>INSIDE WIDTH</u>	<u>INSIDE HEIGHT</u>	<u>SHIPPING WEIGHT</u>
HR75	.75	3/4" - 1"	22"	16"	22"	35#
HR1	1	3/4" - 1"	30"	17"	28"	65#
HR1NY	1NY*	3/4" - 1"	29"	16"	36"	91#
HR2	2	1 1/4" - 2"	40"	17"	36"	100#
HR3N	3 NRS	2 1/2" - 3"	69"	20"	38"	250#
HR3E	3 OS&Y**	2 1/2" - 3"	69"	20"	44"	270#
HR3FN	3 F+ NRS	2 1/2" - 3"	32"	26"	38"	160#
HR3FE	3F+ OS&Y	2 1/2" - 3"	32"	31"	38"	175#
HR3NYN	3 NY* NRS	2 1/2" - 3"	69"	20"	47"	280#
HR3NYE	3 NY* OS&Y	2 1/2" - 3"	69"	20"	50"	295#
HR4N	4 NRS	4"	87"	27"	42"	345#
HR4E	4 OS&Y**	4"	87"	27"	48"	380#
HR4FN	4 F+ NRS	4"	36"	30"	39"	185#
HR4FE	4 F+ OS&Y	4"	36"	35"	39"	200#
HR4NYN	4 NY* NRS	4"	87"	27"	49"	385#
HR4NYE	4 NY* OS&Y	4"	87"	27"	54"	415#
HR6N	6 NRS	6"	107"	31"	46"	450#
HR6E	6 OS&Y**	6"	107"	31"	50"	490#
HR6FN	6 F+ NRS	6"	41"	35"	43"	235#
HR6FE	6 F+ OS&Y	6"	41"	45"	43"	270#
HR6NYN	6 NY* NRS	6"	107"	31"	54"	515#
HR6NYE	6 NY* OS&Y	6"	107"	31"	56"	530#
HR8N	8 NRS	8"	125"	37"	54"	620#
HR8E	8 OS&Y**	8"	125"	37"	58"	650#
HR8FN	8 F+ NRS	8"	47"	43"	49"	310#
HR8FE	8 F+ OS&Y	8"	47"	53"	49"	350#
HR8NYN	8 NY* NRS	8"	125"	37"	60"	675#
HR8NYE	8 NY* OS&Y	8"	125"	37"	64"	705#
HR10N	10 NRS	10"	147"	39"	57"	750#
HR10E	10 OS&Y**	10"	147"	39"	64"	820#
HR10FN	10 F+ NRS	10"	51"	47"	51"	575#
HR10FE	10 F+ OS&Y	10"	51"	63"	51"	635#
HR10NYN	10 NY* NRS	10"	147"	39"	64"	820#
HR10NYE	10 NY* OS&Y	10"	147"	39"	70"	880#

- Factory modifications to length, width or height available upon request •
- Length and width #'s are centerline of BFP; add 12" for outside base dimensions •

* NY = NEW YORK STANDARD OR 30" CENTERLINE BFP MOUNTING

** OS&Y HANDLES AND STEMS ARE ACCOMMODATED INSIDE ENCLOSURE **

+ F = ENCLOSURES DESIGNED FOR FEBCO 870/880 SERIES BFP