

Model 35B
Pressure Regulating Valve
1/2" to 1"

Suitable for supply water pressures up to 400 lbs. and can be adjusted from 25 to 75 lbs. delivery pressure to the system. The standard setting is 50 lbs. NPT female inlet and outlet. Max. temperature 180°F.

- No. 35BU
- Integral stainless steel strainer
 - By-pass feature


Models

- No. 35B has NPT threaded inlet and outlet
- No. 35BU has NPT union inlet x NPT threaded outlet
- No. 35BU-S has sweat union inlet x NPT threaded outlet
- No. 35BDU has NPT double union inlet and outlet
- No. 35BDU-S has sweat double union inlet and outlet
- No. 35BM3-Z6 with water meter threaded connections, for meter box installations 5/8", 5/8" x 3/4", 3/4".

Options (Suffix)

- LP - Low pressure range 10-35 lbs. Set for 30 lbs., unless otherwise specified
 - G - with gauge tapping
 - GG - with gauge tapping and 0-160 gauge
 - SC - with sealed spring cage
 - Z3 - with sealed spring cage, stainless steel adjusting and spring cage screws for waterworks pit installations
- Consult factory for:
- QT - with built-in 1/4-turn shut-off on inlet threaded union connection
 - QT-S - with built-in 1/4-turn shut-off on inlet, solder union connection

Series	Size	Dimensions			Weight
		A	B	C	
35B	1/2"	3 1/2"	1 1/4"	3"	1 1/2 lbs.
35B	3/4"	3 1/2"	1 1/4"	3"	1 1/2 lbs.
35B	1"	4 1/4"	1 1/2"	5 1/4"	2 1/2 lbs.
35BU, 35BU-S	1/2"	4 3/8"	1 1/4"	3"	2 1/2 lbs.
35BU, 35BU-S	3/4"	4 3/8"	1 1/4"	3"	2 1/2 lbs.
35BU, 35BU-S	1"	5 1/8"	1 1/2"	5 1/4"	3 1/2 lbs.
35BDU, 35BDU-S	1/2"	5"	1 1/4"	3"	2 1/2 lbs.
35BDU, 35BDU-S	3/4"	5"	1 1/4"	3"	2 1/2 lbs.
35BDU, 35BDU-S	1"	6"	1 1/2"	5 1/4"	4 lbs.

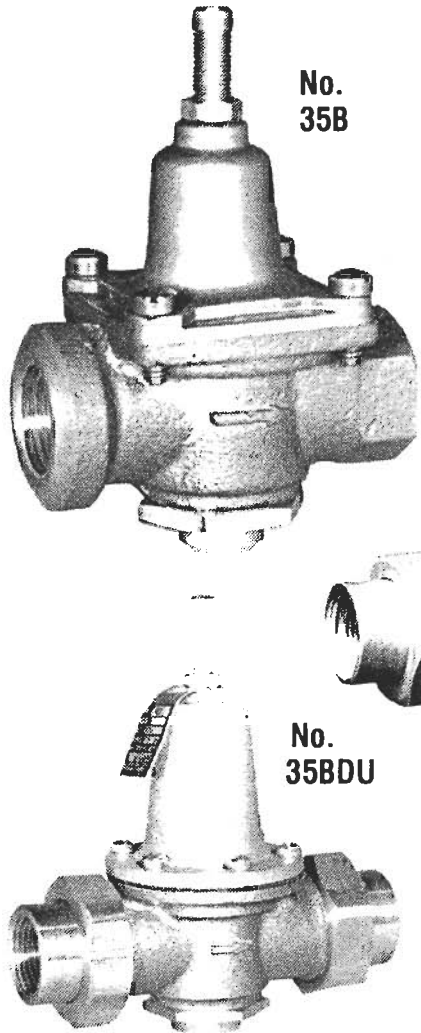

Meets A.S.S.E. Std. 1003 (ANSI A112.26.2), and is listed by I.A.P.M.O.

