


# MODEL 710 / 715

## APPROVALS

- ASSE (Std. 1001)
- CSA B64.1.1 Certified
- IAPMO® Listed

## FLOW CURVES

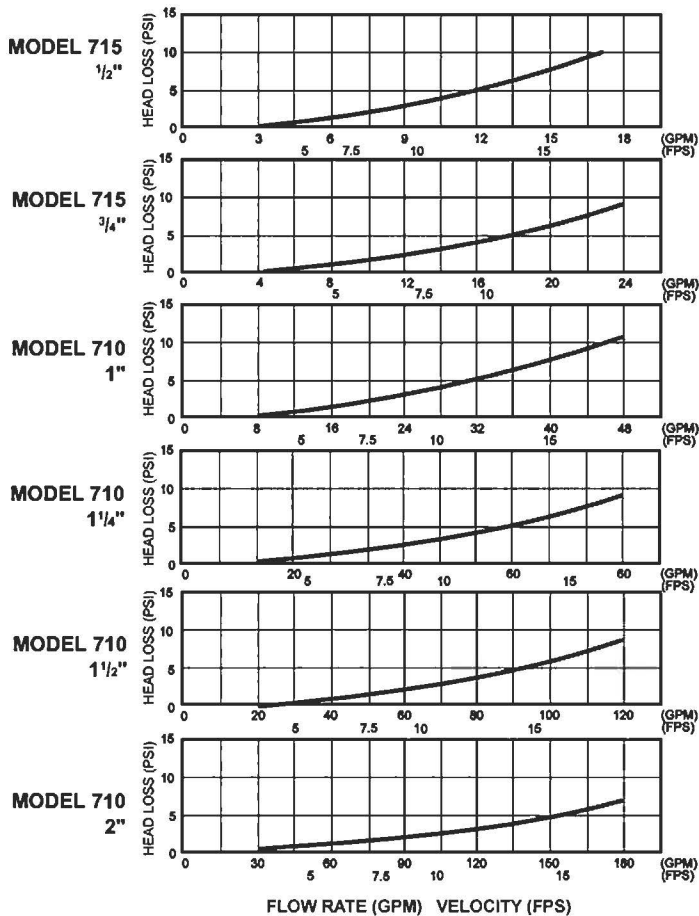

## PARTS & REPAIR KITS



1 BONNET



2 GASKET



3 RETAINER  
(1/2" & 3/4" SIZES)



4 DISC



5 POPPET



6 BODY

## MATERIALS & CHARACTERISTICS

Maximum working pressure	150 PSI (1034 KPa)
Hydrostatic test pressure	150 PSI (1034 KPa)
Temperature range	710 (1"-2") 32°F to 110°F 715 (1/2"-3/4") 32°F to 180°F
Fluid	Water
End detail	1PT thread ANSI B2.1
Valve body	Bronze
Elastomers	Nitrile
Poppet	Acetal/Polypropylene 1/2, 3/4, 1, 1 1/4, 1 1/2, 2

## REPAIR KITS

#	DESCRIPTION	1/2"- 3/4"	1"	1-1/4"	1-1/2"	2"
1	Bonnet - R.B.	901-217	901-250	901-251	901-252	901-253
2	Bonnet - P.C.	901-219				
3	Repair Kit (Includes 2,3,4,5)	905-046	901-549	901-550	901-551	901-552