


## COMPLIANCE

- FCCC & HR
- ANSI/AWWA C511-89 Conformance
- ASSE Listed (Std 1013)
- CAN/CSA B64.4 Certified





## CHARACTERISTICS

Maximum working pressure	175 PSI (1200 KPa)
Hydrostatic test pressure	350 PSI (2400 KPa)
Temperature range	32°F to 140°F (0° to 60°)
Fluid	Water
End Detail	Threaded ANSI/ASME B1.20.1
Main valve body	Bronze
Relief valve body	Bronze
Elastomers	Seat Disc: Nitrile Diaphragms: Nitrile, fabric reinforced.
Springs	Stainless Steel

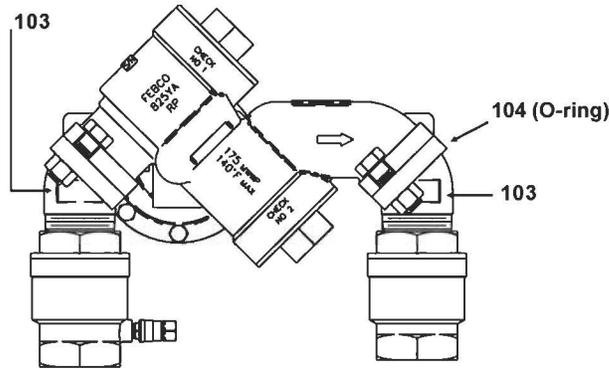


**Model 825YA (3/4" -2")**

## VERTICAL FLOW IN/VERTICAL FLOW OUT MODEL 825YA FLOW CURVES

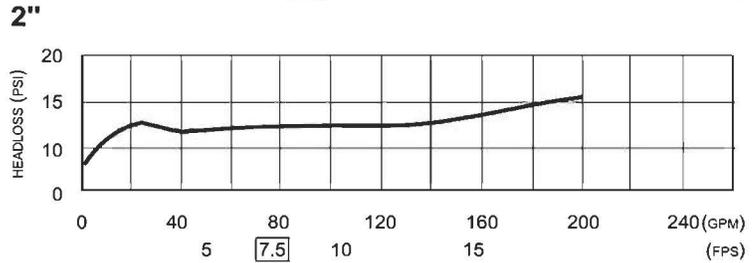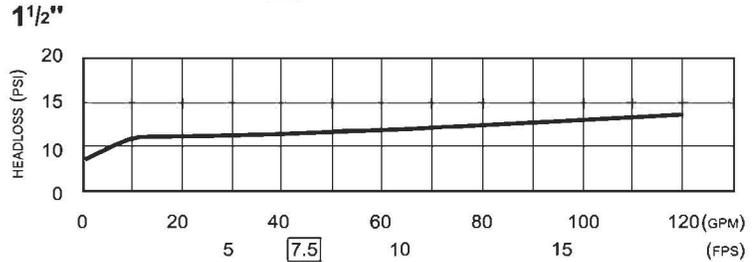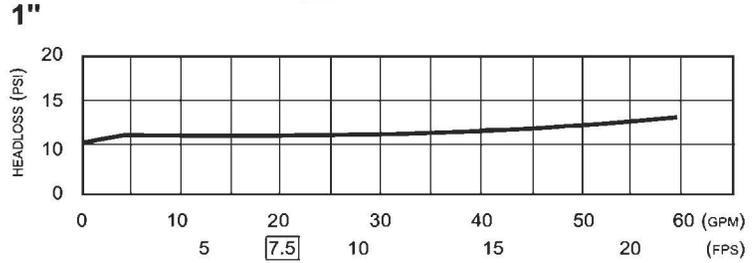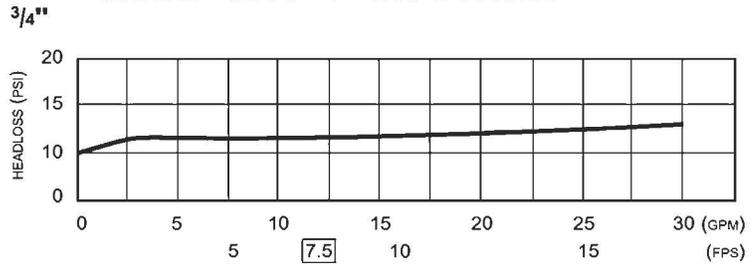

**REPAIR KITS & PARTS FOR THIS MODEL CAN BE FOUND ON 825Y PRODUCT PAGES**

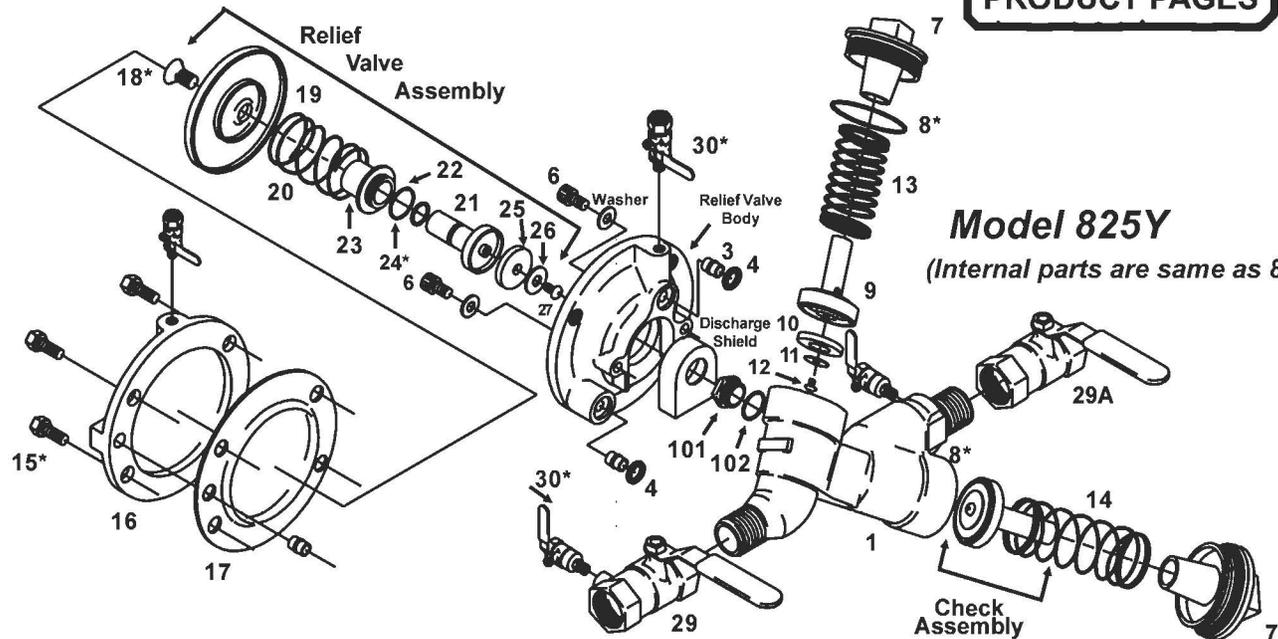

**American Backflow Specialties**

[www.americanbackflow.com](http://www.americanbackflow.com)

(800) 66-BKFLO

(619) 527-2525

Fax: (619) 527-2527