


# PRO-MASTER

## Model ASRP-4 ASRP-4PM Test Kit

### FEATURES

- Professional equipment with features no other testing equipment offers.
- Gauges constructed entirely of brass and steel.
- Units are triple tested before shipment.
- Full scale certified calibration report indicating every pound reading furnished with every unit.
- **5 YEAR WARRANTY.**
- Removable from carry case. Hanger chain of 90 lb. stainless steel provided.
- Internally protected from water hammer.
- Line pulsation greatly reduced.
- Temperature compensated for varying conditions  
- No waiting for the gauge to adjust for accuracy.
- Repairable needle valves, without special tools or equipment.

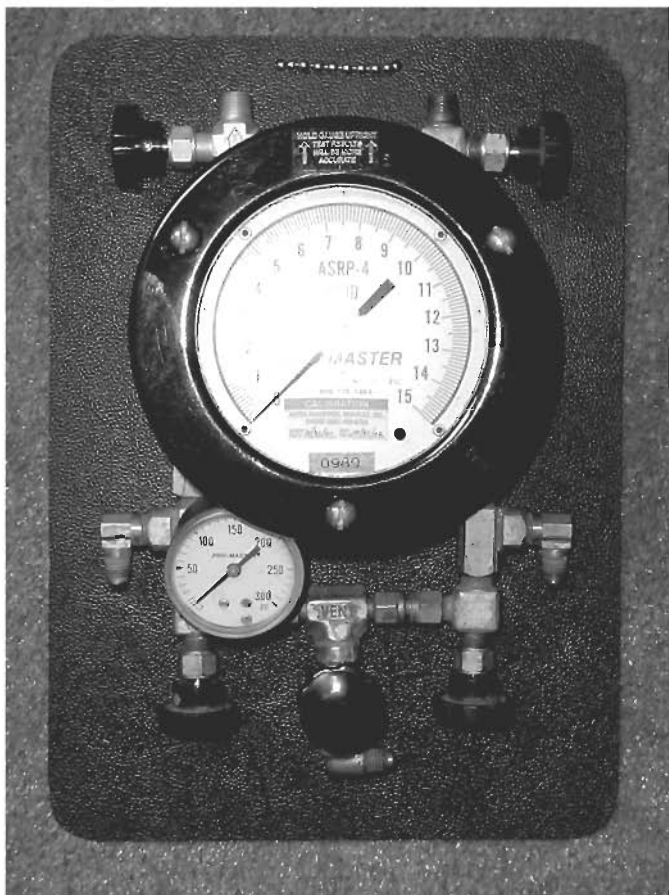

- No filters are required. Debris is easily flushed out without dismantling equipment.
- Freeze protection. Water drains in seconds when all needle valves are open. Gauge fluids can withstand temperatures to -20° F.
- 0-300 lb. PSI pressure gauge on the high side manifold, giving you line pressure readings every time you test.

<b>Gauge</b>	Copper Bellows
<b>Dial</b>	4½" round 0 - 15 P.S.I.D. 150 divisions
<b>Accuracy</b>	<b>Model ASRP-4PM</b> ± ½% with parallax mirror scale <b>Model ASRP-4</b> ± ¾% of full scale differential
<b>Temp Range</b>	water filled 35 to 200°F / 1.67° to 93.3°C drained -20 to 200°F / -28.8° to 93.3°C
<b>Case Dimensions</b>	12"W — 15"H — 7"D
<b>Weight</b>	16 lbs. (net)

<b>Work Pressure</b>	500 P.S.I.
<b>Gauge Mtls.</b>	Copper Bellows Brass Body
<b>Valves</b>	¼" resilient seated needle
<b>Tubing &amp; Fittings</b>	Stainless steel/ Brass
<b>Hoses &amp; End Fittings</b>	6' — 2500 burst ¼" Brass ends
<b>Case</b>	High impact thermo plastic
<b>Filters</b>	None Required

Set of brass hose adaptor fittings included in each test kit — 3 ea. 1/8, 1/4 & 1/2".

\*USC-FCCCHR - 9th Edition method

*American Backflow Specialties*  
www.americanbackflow.com

(800) 66-BKFLO

(619) 527-2525

Fax: (619) 527-2527